


TEMPERATURE CONVERSION CHART (°F and °C)

SHOWING MELTING POINTS OF COMMONLY USED ELEMENTS

Temperature Conversion:

$$\text{Degrees F} = (\text{°C} \times 9/5) + 32$$

$$\text{Degrees C} = (\text{°F} - 32) \times 5/9$$

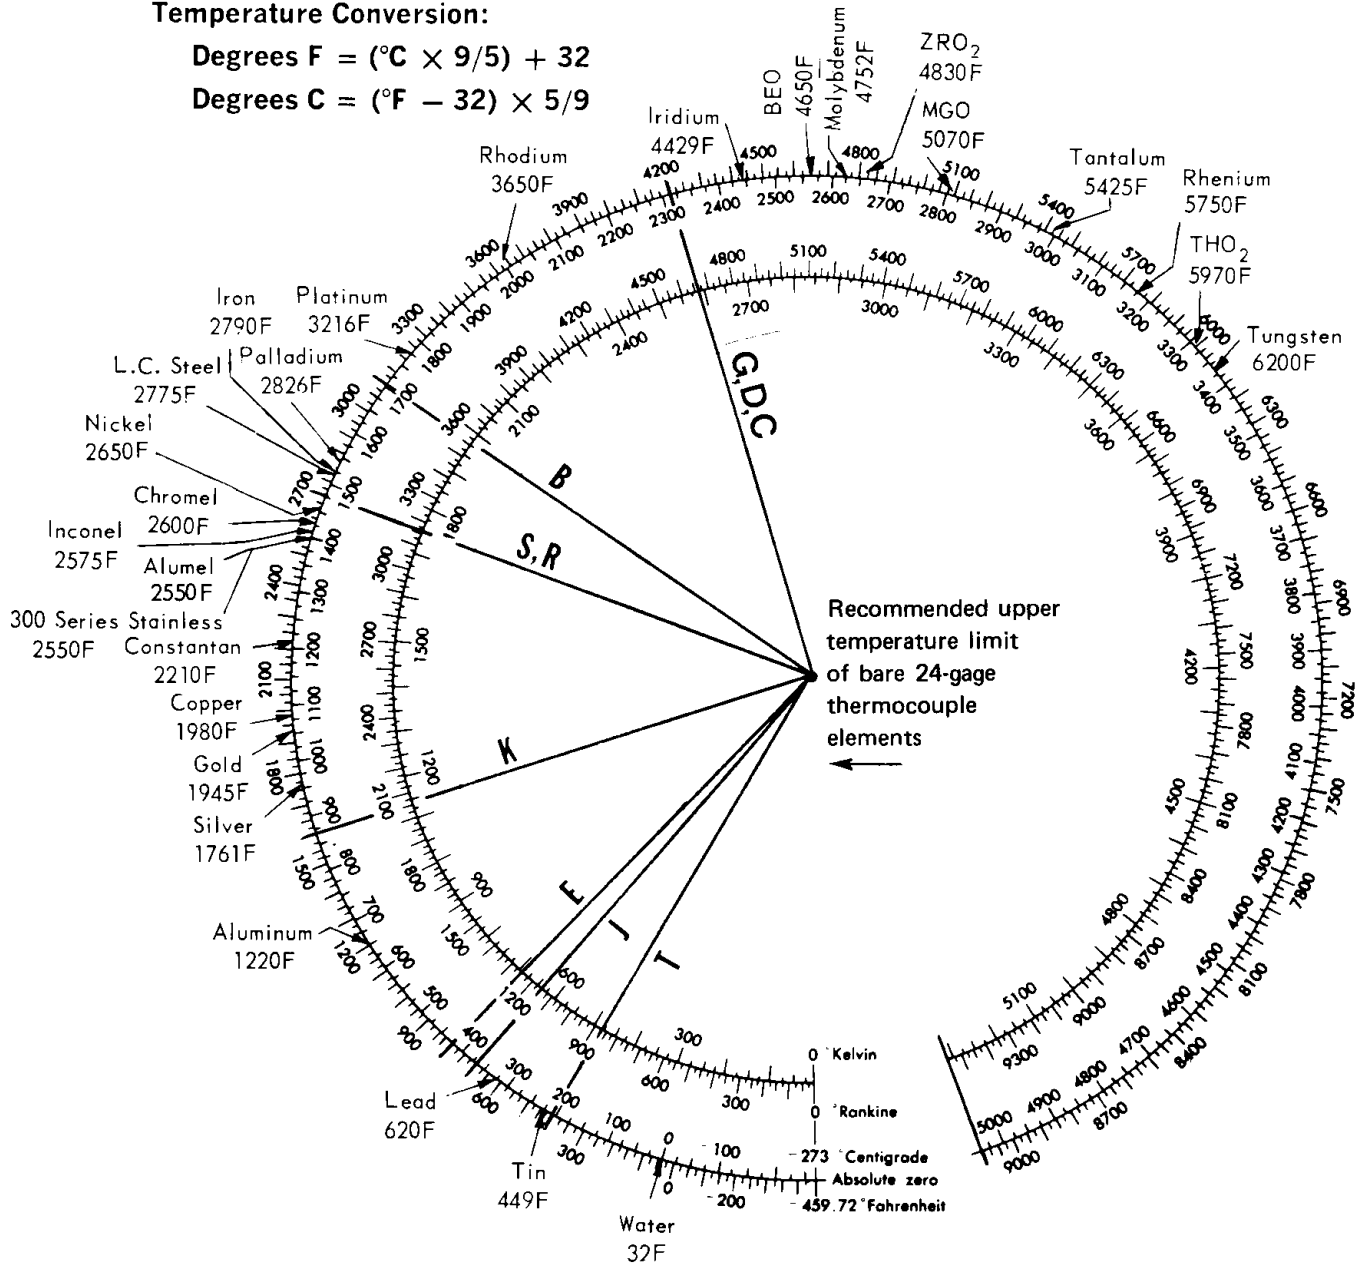

Useful Range of Thermocouples -458°F to +4800°F

We credit the following trademarks used throughout this handbook to their respective companies:

Advance—Driver-Harris Co.
Alumel—Hoskins Mfg. Co.
Chromel—Hoskins Mfg. Co.

Constantan—Wilbur B. Driver Co.
Kapton—E.I. DuPont
Platinel—Engelhard Industries Inc.

Refrasil—Thomson Co.
Refrax—Carborundum Co.
Teflon—E.I. DuPont